


Ordering Code: **MH03RAT-X-Y-Z 01**

Stack Height : 44.5mm

UNIT:mm

O-RING CODE NO. 4KAA012AA001

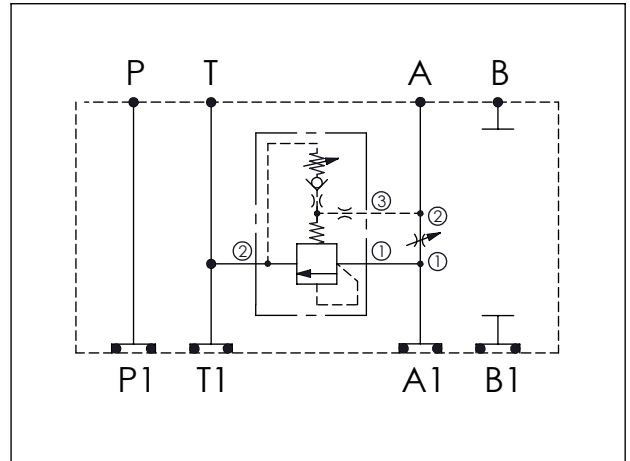

### TECHNICAL DATA



Aluminum Body Pressure Rating: 250 bar  
 Ductile Iron Body Pressure Rating: 350 bar

Rated flow: 40 l/min

Cartridge Valve:  
 Refer to NV08W-X-Y-Z  
 RV11A-X-Y-Z  
 \* Refer to Winner Cartridge Valve Catalog.

Aluminum	0.42 kg (WITHOUT VALVES) 0.7 kg (INCLUDE VALVES)
----------	---

\* If you need the special specification. Please contact us.

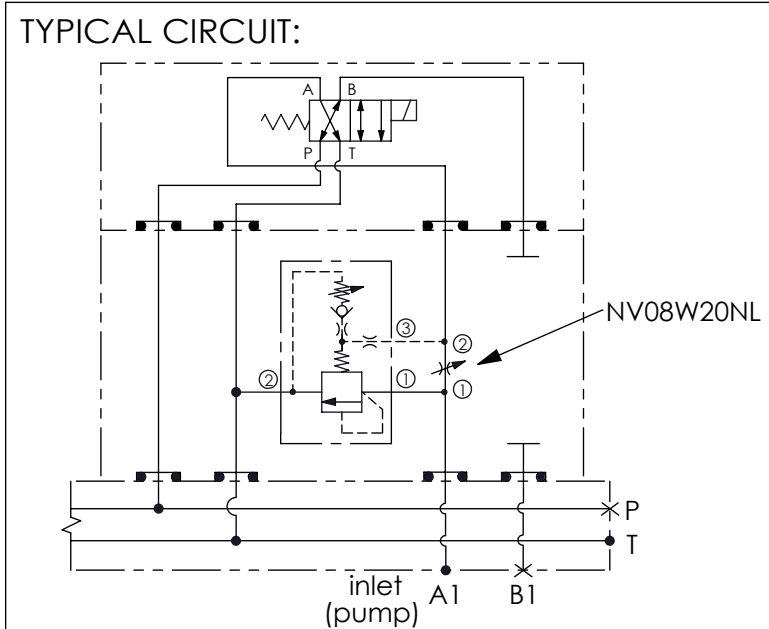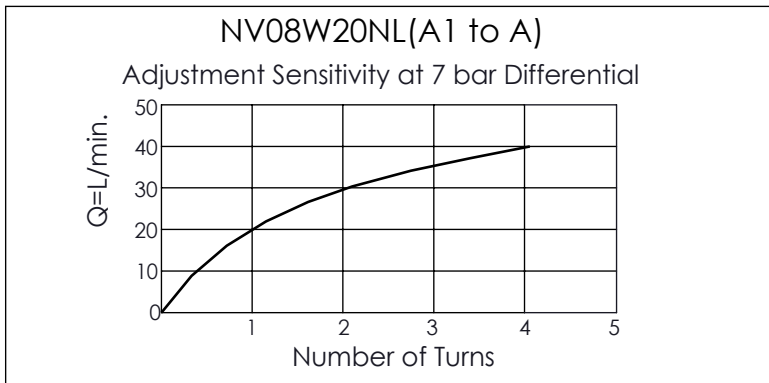

X	SELECTION FOR FLOW CONTROL	
<b>08W2</b>	CAVITY ONLY (WITHOUT VALVE)	
<b>NV0N</b>	NV08W20NL (350bar)	
Y	SELECTION FOR RELIEF VALVES	
<b>11A3</b>	CAVITY ONLY (WITHOUT VALVE)	
<b>RVBW</b>	RV11A3BWL (40LPM, 10.5-315bar) ( $\Delta P = 7bar$ )	
Z	BODY MATERIAL	
<b>A</b>	HIGH-STRENGTH ALUMINUM	