


TECHNICAL DATA

Max.Operating pressure:	350	bar
Rated flow:	60	l/min
Cavity-Tooling:	13A-2	
Installation torque:	40-50	Nm
Weight:	0.21	kg

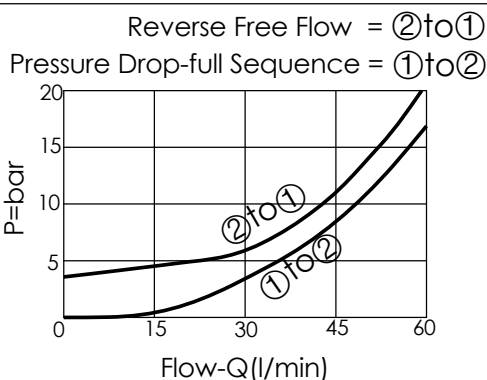

X OPERATION

20	Standard Type
-----------	---------------

Maximum Valve Leakage at Restat (0.7 cc/min.)

Y

SPRINGS

ADJUSTMENT RANGES

A	35 to 210 bar (70 bar Standard Setting)
B	20 to 105 bar (70 bar Standard Setting)
C	40 to 420 bar (140 bar Standard Setting)
D	14 to 55 bar (28 bar Standard Setting)
E	7 to 28 bar (14 bar Standard Setting)
W	55 to 315 bar (70 bar Standard Setting)

Z

OPTIONS

L	Leakproof hex. socket screw.	
C	Stainless Steel Tamper Resistant Cover.	