


TECHNICAL DATA		
Max.Operating pressure:	350	bar
Rated flow:	120	l/min
Cavity-Tooling:	5A-2	
Installation torque:	60-70	Nm
Weight:	0.37	kg

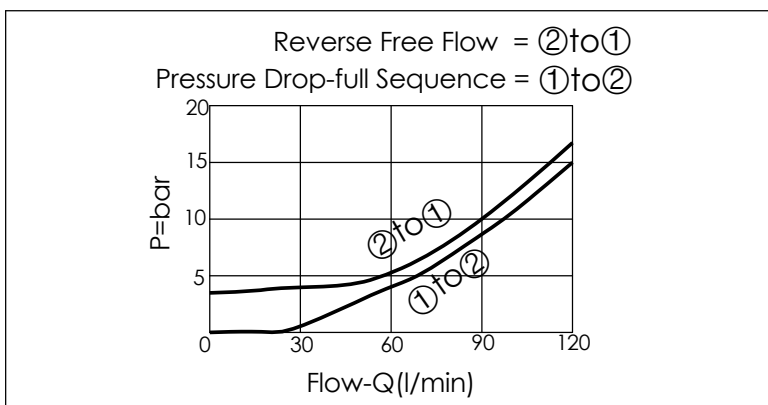

X	OPERATION	
20	Standard Type	
Maximum Valve Leakage at Restat (0.7 cc/min.)		

Y	SPRINGS	
	ADJUSTMENT RANGES	
A	35 to 210 bar	(70 bar Standard Setting)
B	20 to 105 bar	(70 bar Standard Setting)
C	40 to 420 bar	(140 bar Standard Setting)
D	14 to 55 bar	(28 bar Standard Setting)
E	7 to 28 bar	(14 bar Standard Setting)
W	55 to 315 bar	(70 bar Standard Setting)

Z	OPTIONS	
L	Leakproof hex. socket screw.	
C	Stainless Steel Tamper Resistant Cover.	